

# PMI AUCTION

## MASSIVE STAMPING, FABRICATING & MACHINING FACILITY

Featuring: (17) STRAIGHT SIDE PRESSES Incl. (7) MINSTER HEVI-STAMPERS up to 600 T. Cap. (see videos); High Speed & OBI Minster Presses; Massive Amounts of Press Feed Equip.; Huge Fab Shop with 2016 ACCURPRESS 750 T. x 14' CNC Pressbrake & 2016 MAZAK 6,000 Watt Fiber Laser II; Machine Shop w/Several HAAS VMCs New as 2016; Robotic Welding Cells; Q.C. Dept.; Raw Material; Forklifts; MORE

2016



ACCURPRESS  
750 T. X 14'  
CNC PRESS BRAKE

600 T.



MINSTER  
E2-600-120-60  
"HEVI-STAMPER"  
STRAIGHT SIDE  
ECCENTRIC  
GEARED PRESS

Live Onsite w/Webcast - At the Premises of  
**MIDLAND STAMPING  
& MACHINING**  
9500 AINSLIE STREET  
SCHILLER PARK, IL 60176  
(See Directions on Page 11)

**WEDNESDAY,  
SEPTEMBER 15  
9:00 A.M.**

**INSPECTION:** Monday & Tuesday,  
Sept. 13 & 14, 9:00 A.M. to 4:00 P.M.

400 T.

2  
AVAILABLE



MAZAK OPTIFLEX 3015 CNC FIBER LASER CUTTING MACHINE

**FOR ONLINE BIDDING  
AT THIS AUCTION.**

Go to  
[www.pmi-auction.com](http://www.pmi-auction.com)  
and click on  
[BidSpotter.com](http://BidSpotter.com) or  
[proxibid](http://proxibid) on our  
calendar page for this  
auction sale.

**BUYER'S PREMIUM:**  
15% ONSITE  
18% WEBCAST

Read Partial Terms &  
Conditions on Page 11



MINSTER E2-400-108-54 "HEVI-STAMPER"  
STRAIGHT SIDE ECCENTRIC GEARED PRESS

Sale  
Conducted  
By: **PLANT & MACHINERY INC.**  
AUCTIONEERS • APPRAISERS • LIQUIDATORS • REAL ESTATE

1304 Langham Creek Drive, Suite 454, Houston, Texas 77084

PHONE: (713) 691-4401

FAX: (713) 672-7905

E-MAIL: [pmi@pmi-auction.com](mailto:pmi@pmi-auction.com) • WEBSITE: [www.pmi-auction.com](http://www.pmi-auction.com)  
Ron Moore IL Lic. #441.000726, PMI Lic. #444.000219  
**HOUSTON • DALLAS • ST. LOUIS**

In Conjunction With:

**Gordon  
Brothers**  
1903

and With:

**Maynards**  
Industries (1991) Inc. SINCE 1902  
AUCTIONEERS | LIQUIDATORS | APPRAISERS



**600 T.**

**MINSTER  
E2-600-120-60  
"HEVI-STAMPER"  
STRAIGHT SIDE  
ECCENTRIC  
GEARED PRESS**

**MINSTER  
E2-400-108-54  
"HEVI-STAMPER"  
STRAIGHT SIDE  
ECCENTRIC  
GEARED PRESS**

**400 T.**

**WEDNESDAY,  
SEPTEMBER 15  
9:00 A.M.**

**LIVE ONSITE  
W/WEBCAST**

**INSPECTION:**

Monday & Tuesday,  
September 13 & 14  
9:00 A.M. to 4:00 P.M.

**NOTE: EARLY  
START TIME**

**STRAIGHT SIDE 2-POINT ECCENTRIC GEARED PRESSES**

**MINSTER 600 T. CAP. MDL. E2-600-120-60 "HEVI-STAMPER" ECCENTRIC GEARED,** (1994), 12" stroke length, 6" slide adjustment, 24" shut ht., 0-60 strokes/minute, 120" x 60" T-slotted bolster area, 54" windows, (3) kick outs in slide, 7" bolster plate, air clutch, brake, air counterbalance, programmable control, and light curtains, S/N E2-600-28648.

**MINSTER MDL. E2-400-108-54 "HEVI-STAMPER" ECCENTRIC GEARED,** (1989), 12" stroke length, 6" slide adjustment, 30" shut ht., 0-70 strokes/minute, 108" x 54" bolster area, 30" windows, air clutch, brake, air counterbalance, (2) Mdl. 28H die cushions, programmable control, and light curtains, S/N E2-400-27217.

**MINSTER 400 T. CAP. MDL. E2-400-108-54 "HEVI-STAMPER" ECCENTRIC GEARED,** (1990) 12" stroke, 6" adj., 30" shut ht., 0-70 SPM, 108" x 54" T-slotted ram and bolster size, 31"W. windows, (2) Mdl. 28H die cushions, air clutch and brake, air counterbalance, light curtains, Autotech Mdl. M1030 press load monitor, Autotech Mdl. M1200 die protections system, S/N E2-400-27532.

**(3) MINSTER 300 T. CAP. MDL. E2-300-96-48 "HEVI-STAMPER" ECCENTRIC GEARED,** 12" stroke, 6" slide adj., 30" shut ht., 0-80 SPM, 48" x 96" T-slotted ram and bolster size, 27" windows, (2) Mdl. 26H die cushions, air clutch and brake, air counterbalance, light curtains, S/N E2-300-25610 (1983) w/Autotech Controls Mdl. M1200 die protection system, Mdl. M1030 load monitor, S/N E2-300-25609 (1983), S/N E2-300-26468 (1986).

**MINSTER 200 T. CAP. MDL. E2-200-72-24 "HEVI-STAMPER" ECCENTRIC GEARED,** (1980), 8" stroke, 6" pwr. slide adj., 26" shut ht., 0-90 SPM, 72" x 42" T-slotted bolster, (2) die cushions, front and rear control stations, 25"W. windows, light curtains, S/N E2-200-24599.

**MINSTER 200 T. CAP. MDL. SE2-200-84-48 ECCENTRIC GEARED,** (1966), 18" stroke length, 8" slide adjustment, 36" shut ht., 0-15 strokes/minute, 84" x 48" bolster area, 21" windows, w/air clutch, brake, air counterbalance, (2) 24"D. die cushions, S/N SE2-15654.

**400 T.**

**MINSTER E2-400-108-54 "HEVI-STAMPER"  
STRAIGHT SIDE ECCENTRIC GEARED PRESS**

**3  
AVAILABLE**

**MINSTER E2-300-96-48 "HEVI-STAMPER"  
STRAIGHT SIDE ECCENTRIC GEARED PRESS**

**300 T.****200 T.**

**MINSTER E2-200-72-42 "HEVI-STAMPER"  
STRAIGHT SIDE ECCENTRIC GEARED PRESS**



1,000 T.



VERSION S4-1000-132-72 4-POINT ECCENTRIC GEARED STRAIGHT SIDE PRESS

500 T.



VERSION S2-500-96-60T STRAIGHT SIDE DOUBLE CRANK PRESS

3 AVAILABLE



VERSION S2-300-96-54T STRAIGHT SIDE DOUBLE CRANK PRESS

300 T.

## STRAIGHT SIDE 4-POINT ECCENTRIC GEARED PRESSES

**VERSION 1,000 T. CAP. MDL. S4-1000-132-72**, (1970), twin drive double geared, 14" stroke length, 16" slide adjustment, 38" shut ht., 12 and 17 strokes/minute, 132" x 72" bolster area, 54" windows, 5" thick bolster plate, (4) knock outs in slide, w/air clutch, brake, air counterbalance, 42 T. die cushions, programmable control, and light curtains, S/N 21745.

**VERSION 600 T. CAP. MDL. S4-600-132-68T**, (1968), 12" stroke length, 10" slide adjustment, 34" shut ht., 18-25 strokes/minute, 132" x 68" bolster area, 10" thick bolster, (5) knock outs in slide, 39" windows, w/air clutch, brake, air counterbalance, (3) Type 3-U30-6 die cushions, programmable control, and light curtains, S/N 19825.

**CLEARING 600 T. CAP. MDL. S4-600-144-72**, (1985), 12" stroke, 12" adj., 40" shut ht., 20-40 SPM, 144" x 72" T-slotted ram and bolster, air clutch and brake, air counterbalance, Imco tonnage monitors, Wintress Die Pro safety device, S/N 10-4698 (\*Note: This press was purchased and dismantled but never reinstalled in the facility. It is currently ready for transport).

## STRAIGHT SIDE DOUBLE CRANK PRESSES

**VERSION 500 T. CAP. MDL. S2-500-96-60T**, (1974), 10" stroke, 34" shut ht. to bed (SDAU), 6" pwr. ram adj., 25-50 SPM, 96" x 60" T-slotted ram and bolster, 40"W. windows, air clutch, brake, air counterbalance, programmable control, light curtains, and dual palm buttons, S/N 24757.

**(3) VERSION 300 T. CAP. MDL. S2-300-96-54T**, 12" stroke, 6" ram adj., 33" shut ht., 25 SPM, 96" x 54" T-slotted ram and bolster, air clutch and brake, air counterbalance, Wintriss DiPro 1500 die protection, Imco tonnage monitor, light curtains, (2) Type 2-U28-6 bed cushions, S/N 23176, S/N 24402, S/N 24843.

**MINSTER 200 T. CAP. MDL. S2-200-84-42**, (1960), 14" stroke, 12" adj., 27" shut ht., 84" x 42" bolster, 20 SPM and 30 SPM, (2) 33" L-R x 27" F-B die cushions, 1.6 T. cap. each, 5.5" cushion travel, air clutch and brake, air counterbalance, 22"W. windows, light curtains, S/N MS2-200-12503.

**VERSION 150 T. CAP. MDL. C2-150-72-48T**, (1967), 12" stroke length, 8" slide adjustment, 26" shut ht., 0-22 SPM, 72" x 48" bolster area, 26" windows, air clutch and brake, air counterbalance, Type 2U18-7 die cushion, programmable control, and light curtains, S/N 19412.

## HIGH SPEED PRESSES

**(3) MINSTER PIECEMAKER 150 T. CAP. MDL. P2-150**, 6" stroke, 4" slide adj., 24" shut ht., 45-90 SPM, 60" x 40" bolster, 20"W. windows, air clutch and brake, air counterbalance, Indramat drive system, light curtain safety device, S/N P2-150-21391 w/Perfecto Mdl. 600-18 crank mtd. double roll feed, S/N P2-150-20069 w/Littell 18" crank mtd. feed, SN P2-150-21390 w/Perfecto Mdl. 600-18 crank mtd. roll feed, (2) 14"D. die cushions.

## OBI PUNCH PRESSES

**NIAGARA 88 T. CAP. MDL. A5**, 4-1/2" stroke, 17-1/2" shut ht., 3-3/4" adj., 40 SPM, air clutch and brake, backgeared, S/N 30087.

**MINSTER 45 T. CAP. NO. 5**, 6" stroke, 2-3/4" adj., air clutch and brake, backgeared, S/N 5056.

3 AVAILABLE



MINSTER P2-150 "PIECEMAKER" HIGH SPEED DOUBLE CRANK STRAIGHT SIDE PRESS

150 T.



VERSION S4-600-132-68T 4-POINT ECCENTRIC GEARED STRAIGHT SIDE PRESS

600 T.





ROWE 40" SERVO COIL FEED LINE



MINSTER/LITTELL 32" SERVO FEEDLINE



AIDA 24" SERVO COIL FEED LINE



72" FEEDLEASE/DALLAS AIR FEED COIL LINE

## SERVO PRESS FEED LINES

**LITTELL 72"W.**, consisting of the following components: **NO. S300-72 POWERED CENTERING REEL**, 20,000-lb. cap., 19"-24" I.D., 72" O.D., 72" width, pwr. mandrel expansion, S/N 84527-80; **LITTELL MDL. 676-7PD 7-ROLL INCLINED CONTINUOUS STRAIGHTENER**, .080" thickness x 72"W. cap., peeler tbl., hold-down roll, S/N 84526-80; **LITTELL MDL. 7-72DLC SERVO FEEDER**, .018"-.080" thickness cap. x 72"W., entry pinch rolls, edge guides, oiler, S/N 84525-80.

**ROWE 50"W.**, consisting of the following components: **ROWE MDL. 10050-DSJ POWERED COIL REEL**, 10,000-lb. cap., 50" max. material width, pwr. expansion w/fold-down roll, S/N 26190; **ROWE 12,000-LB. CAP. MDL. BGY-12-15 COIL CAR**, 60" max. O.D., 50" max. width, S/N 28205; **ROWE MDL. C3-50 7-ROLL INCLINED STRAIGHTENER**, 2"-.085" thickness cap., 50" width, entry/exit pinch rolls, guide rolls, exit cascade roll, S/N 26191; **ROWE MDL. DFC-553-450 SERVO FEEDER**, 110" x 50"W. cap., Emerson control, variable to 300 FPM, 5 HP, S/N 26192.

**(2) ROWE 40"W.**, consisting of the following components: **ROWE MDL. 10040-DJS PWRD. COIL REEL**, 40"W., 10,000-lb. cap., 60" max. coil dia., S/N 24224, electric brake, pwr. coil car, pwr. mandrel expansion, snubber roll; **ROWE MDL. C3-40, 5-ROLL INCLINED STRAIGHTENER**, entry and exit pinch rolls, tilt up thdng. tbl., exit cascade roll, S/N 24225; **ROWE FLIP-UP THREADING TBL.**, **ROWE MDL. PM-FDC-053-240 SERVO ROLL FEED**, variable to 300 FPM, input cascade rolls, air pinch, lubricator box, S/N 27107, S/N 27183.

**ROWE 40"W.**, consisting of the following components: **ROWE MDL. 7540-DSV COIL REEL**, 7,500-lb. cap., 40"W., 60" max. O.D., S/N 17750, CWP coil car, pwr. mandrel expansion, **ROWE MDL. C-40, 5-ROLL STRAIGHTENER**, .020 mild steel cap. min., .110 max., entry/exit pinch rolls, exit cascade rolls, S/N 17751; **ROWE TILT-UP THREADING TBL.**, **CWP SERVOMAX SE MDL. SMXSE42H SERVO ROLL FEED**, 42" max. material width, entry cascade roll, edge guides, S/N C16717.

**MINSTER/LITTELL 32"W.**, consisting of the following components: **LITTELL 20,000-LB. CAP. MDL. S200-36 AUTO CENTERING TRAVELING BASE REEL**, 20"-24" I.D., 66" O.D., 36"W., auto expansion, 20,000-lb. cap. coil car, S/N 80223-74-1, mated to **LITTELL MDL. 638-5PD CONTINUOUS STRAIGHTENING MACHINE**, .125" max. thickness, 36"W., hold-down, peeler tbl., air operated thdng. tbl., S/N 74966-66; **MINSTER MDL. 7-32SR SERVO ROLL FEED**, 32" max. width, edge guides, entry pinch roll, oiler, S/N 1850007.

**(2) AIDA 24"W.**, consisting of the following components: **AIDA MDL. ESR3-H(S) DOUBLE SPINDLE COIL REEL**, 59" max. O.D., 4"-24" width, 6,000-lbs. x 2 cap., hyd. mandrel expansion, S/N 13600-3408 and S/N 13600-3407; **AIDA MDL. LS-6032 5-ROLL STRAIGHTENER**, 4"-24" width, .019"-.125" thickness, entry/exit pinch rolls, exit cascade roll, lube control, variable frequency drive, S/N 13600-3405 and S/N 13600-3406; **AIDA MDL. RSE-60(S) SERVO FEEDING MACHINE**, 4"-24" width, .02"-.12" thickness, 30-80 SPM, entry cascade rolls, edge guide, S/N 10990-1236 and S/N 10990-1237.

## STRAIGHTENERS

**CWP MDL. 30C INCLINED STRAIGHTENER**, 30" max. width, 093" max. thickness, entry/exit pinch rolls, S/N 37357; **LITTELL MDL. 308 CONTINUOUS STRAIGHTENER**, 8" max. width, .018" cap., entry pinch roll, S/N 61038-56; **JAYBIRD 5-ROLL PULL THROUGH STRAIGHTENER**; **VAMCO MDL. E-CFS-14 SERVO PRESS FEED**, 14" max. width, entry guide rolls; **UNKNOWN MFG. 7-ROLL PULL THROUGH STRAIGHTENER**, 6" max. width; **PERFECTO 7-ROLL STRAIGHTENER**, 24" max. width, variable spd. drive, loop controller; **LITTELL MDL. 424-7PD STRAIGHTENER**, .078" thickness x 24"W., S/N 87083-82; **EGAN MDL. S39-648 5-ROLL STRAIGHTENER**, 56" max. material width, entry/exit pinch rolls, S/N 2002.

## AIR PRESS FEED LINE

**FEEDLEASE MDL. FLCC-2017-7260-P20 COMBINATION CRADLE 5-ROLL STRAIGHTENER**, 72"W., 20,000-lb. cap., air operated entry/exit pinch rolls, S/N 1904; **DALLAS INDUSTRIES 72"W. AIR FEEDER**, Coilmatic Mdl. 2D500-60-36RH 7-roll pull through straightener, .190" max. x 60"W., adj. ht. base, S/N 21062.

## PRESS FEEDERS

**ADIA MDL. RSC-60 FEEDER**, 1.96"-25"W., .02"-1.25" thickness, S/N 1990-1282 (in need of repair); **AIDA MDL. RSC-60 FEEDER**, S/N 10990-1186; **LITTELL SERVO ROLL FEEDER**, 60" max. width, Indramat drive, guide rolls, edge guides, input cascade rolls, S/N 69000-61.





LITTELL 10,000-LB. POWERED COIL REEL



LITTELL 72" SERVO COIL FEED LINE



AIDA 24" SERVO COIL FEED LINE



CLOSEUP OF MINSTER SERVO FEEDER



VIEW OF T-SLOTTED BOLSTERS



CANTILEVER RACKS AND SHEET STOCK



Live Onsite w/Webcast – At the Premises of

## MIDLAND STAMPING & MACHINING

9500 AINSLIE STREET

SCHILLER PARK, ILLINOIS 60176

(See Directions on Page 11)

**WEDNESDAY, SEPTEMBER 15  
9:00 A.M.**

### COIL REELS

**LITTELL 11,000-LB. CAP. MDL. 90-30 AUTO CENTERING COIL REEL**, 30" max. width, 20"-24" I.D., manual arbor expansion, electric brake, S/N 39269-50-2.

**LITTELL 10,000-LB. CAP. MDL. 90-30 AUTO POWERED COIL REEL**, 20"-24" I.D., 66" O.D., 48" max. width, pwr. expansion, integral adj. ht. coil car w/pwr. travel, S/N 80150-73.

**COILMATIC 6,000-LB. CAP. MDL. PR3650 POWERED COIL REEL**, manual expansion, 36" max. width, S/N 87175.

**LITTELL 4,000-LB. CAP. MDL. 40-18 DOUBLE COIL REEL**, 18"-22" I.D., 20" max. width, manual expansion, S/N 71492-67.

**LITTELL 6,000-LB. CAP. DOUBLE COIL REEL**, 14" max. width, S/N S2636-77.

**PERFECTO POWERED DOUBLE COIL REEL**, 12" max. width, swivel base, manual expansion, adj. slide, S/N N.A.

**LITTELL 600-LB. CAP. NO. 5G MOTORIZED CENTERING REEL**, 10" max. width, S/N N.A.

**LITTELL 300-LB. CAP. DOUBLE COIL REEL**, 10" max. width, S/N N.A.

### PRESSROOM EQUIPMENT

**PERFECTO 8,400-LB. CAP. MDL. CTT-10 COIL TIPPER**, 60" max. coil O.D., 12" max. coil width, operator's pedestal, S/N SP-7692.

**(9) AUTOMATED CONVEYOR SYSTEMS, INC. 24" BELT CONVEYORS**, adj. stands, controls, in 60" and 144" lengths.

**SEVERAL CALDWELL COIL HOOKS** up to 10 T. cap.; **CASTON II 10,000-LB. CAP. MDL. CASII DIGITAL CRANE SCALE**, w/stand, S/N TH02600801; **HUGE ASSORTMENT OF DIE MOUNTING HARDWARE** incl. straps, clamps, T nuts, bolts and other accessories; **LARGE QTY. OF H.D. DIE RACKS**; **(12) T-SLOTTED BOLSTERS** up to 72" x 132" x 12" thk.; **GUILD 24"W. BUTT WELDER**; **(2) GUILD 12"W. BUTT WELDERS**, Miller pwr. supplies.

### RAW MATERIAL

**WIDE SELECTION OF SHEET MATERIALS**, up to 1/8" thickness, most are 5' x 10'. mild steel, stainless steel and aluminum. Large offering of perforated sheets.





**ACCURPRESS 750 T. X 14' CNC PRESS BRAKE**



**CINCINNATI 135 T. X 12' FORM MASTER II CNC PRESS BRAKE**



**AMADA 80 T. CAP. RG80 CNC PRESSBRAKE**



**AJAN 5' X 20' CNC PLASMA CUTTING MACHINE**

**2012**

## CNC PRESSBRAKES

**ACCURPRESS 750 T. x 14' CAP. MDL. 775014**, (2016) 12'6" btwn. housings, 12" stroke, ETS-3000 CNC control, Accurcrown CNC crowning, adj. bending spd., x-prime finger assemblies, H. D. front sheet supports, laser guarding, S/N 12562.

**CINCINNATI 135 T. x 10' CAP. MDL. 135FM-II**, (1995), 10'6" btwn. housings, 12' overall bed and ram, 14" stroke, Form Master II CNC control bed crowning, S/N 48675.

**CINCINNATI 90 T. X 8' CAP. MDL. 90CBIIIX8**, 8'6" dist. btwn. housings, 10' overall, 14" stroke, Cincinnati press control, Merlin light curtains, single axis backgauge, S/N 50558.

**AMADA 80 T. CAP. MDL. RG80**, new 1998, Amada NC9EXII CNC control, 94.6" bed length, 98.7" max. bending length, 80.8" dist. btwn. uprights, 15.76" throat depth, 3.94" stroke, S/N 811573.

## MECHANICAL PRESSBRAKE

**CINCINNATI MDL. 21**, (1974), 400 T. mid stroke, 600 T. at bottom, 10'6" dist. btwn. housings, 12' overall, 4" stroke, Merlin light curtains, ISV press control, Hurco Auto-bend 7 single axis control, machined for angles, S/N 39889.

## PRESSBRAKE ACCESSORIES

**LARGE SELECTION OF SEGMENTED HARDENED AND GROUND DIES AND STANDARD AMERICAN PRESSBRAKE DIES** up to 12' length, on cantilever and roller racks.

## CNC LASERS

**MAZAK MDL. OPTIFLEX 3015 FIBER II**, new 11/2016, Mazatrol Preview 3 CNC control, 60" x 120" max. workpiece size, 122" X, 62.2" Y, 4.3" Z-axis travels, 2,050-lb. max. load cap., 6,000 watt, Mdl. YLS6000IPG Photonics pwr. supply, Plaser dust collection system, light curtain safety barrier, S/N 2377935.

**TRUMPF MDL. TRUELASER 1030**, (2008), Trumpf Mdl. PC-620 CNC, 2,000 watt, new resonator installed 2013, 5' x 10' machine working range, 120" X, 60" Y, 3" Z-axis travels, 1,267-lb. max. workpiece weight, travels: 2,360 IPM positioning spd., 1/2" mild steel max. material thickness, KLH cooling unit, S/N A0215A0008.

## CNC PLASMA CUTTING TABLE

**AJAN 5' X 20' MDL. 1500X6000**, new 2012, Ajan pwr. supply, downdraft tbl., dust collector, Ajan filter control system, Precision Mdl. PP260A 260 amps plasma generator, S/N G12028.

## CNC LASER TURRET PRESS

**AMADA APELIO MDL. AP2357F10**, (1998), Fanuc 05PLA CNC control, Fanuc 2,000 watt laser, 50 T. cap. punch, (44) turret stations, Koolant Koolers chiller system, 2 kW laser, Torit cartridge style dust collector, 25,112 H.O.M., S/N 23570365.



**MAZAK OPTIFLEX 3015 CNC FIBER LASER CUTTING MACHINE**



**AMADA APELIO CNC LASER TURRET PUNCH**





AMADA VIPROS 350 KING CNC TURRET PUNCH



AMADA FABRIVISION SCANNER



AMADA TOGU III PUNCH AND DIE GRINDER

## CNC TURRET PRESS

**AMADA VIPROS 30 T. CAP. MDL. 358 KING**, (1995), Fanuc 04P-CNC control, (58) turret stations, (4) auto. index stations, hyd. pwr. supply unit, brush tbl. w/extensions, hyd. system chiller unit, S/N 35820142.

## TURRET PRESS ACCESSORIES

**AMADA MDL. TOGU III PROGRAMMABLE PUNCH AND DIE GRINDER**, new 2004, S/N 30230603.

**AMADA FABRIVISION SCANNER OPTICAL MEASURING MACHINE**, (1998), (8) cameras, 4' x 6' glass worktable, S/N 2138.

**LARGE ASSORTMENT OF AMADA TURRET PRESS TOOLING OF ALL SIZES.**

## HARDWARE PRESSES

**HAEGER 8 T. CAP. MDL. 824.**

**HAEGER 6 T. CAP. MDL. HP-6B**, w/bowl feed, S/N SFD198.

**PEMSERTER SERIES 4**, new 2016, on fabricated steel stand, S/N M4-6101.

## HYDRAULIC SHEAR

**WYSONG 12' X 1/4" MDL. H2512**, (1993), PC100 CNC backgauge, LH squaring arm, front support, S/N H4-140.

## WET BELT GRINDERS

**MIDWEST AUTOMATION NAUTILUS MDL. N15275-FB**, 30 HP drive motor, 51"W. feed belt, 48" nominal cap., Vortex blower dry-off system, paper filter coolant system, S/N 6623-1806.

**RAMCO MDL. 37T/60WET**, (2005) all stainless steel construction, 37" max. width, dry-off system, paper filtration, S/N 3403.

## MISCELLANEOUS FABRICATING MACHINERY

**AMADA MDL. CSW-220 COMBINATION NOTCHING AND COPING MACHINE**, new 1979, 1/8" max. material thickness, 8-3/4" x 8-3/4" x 1/8" notching cap., rear coping tbl., 8-5/8" x 8-5/8" corner notch, 2" x 4" edge notch, S/N 561907.

**BAILEIGH 24" POWER SLIP ROLL**, grooved lower rolls, mtd. to fabricated steel base.

**(2) BURR KING MDL. 760 3" VERTICAL BELT SANDERS**, on fabricated steel stands.

**WATERS 6" x 10'L. STROKE SANDER**, (2015), 5 HP motor, dust collector.

**LIVE ONSITE  
W/WEBCAST  
1 DAY SALE**



PEMSERTER SERIES 4 HARDWARE PRESS



WYSONG 12' X 1/4" HYDRAULIC SHEAR



RAMCO WET BELT GRINDING MACHINE



AMADA CORNER NOTCHING MACHINE



## VERTICAL MACHINING CENTERS

**(2) HAAS MDL. VF3SSYT**, new 1/2016, 54" x 24" tbl., 1,750-lb. load, 40" X, 26" Y, 25" Z-axis travels, CAT-40, 12,000 RPM, 30 HP, 30 ATC, programmable coolant nozzle, air blow nozzle, Renishaw wireless probing, belt style chip conveyors, tool length probe, S/N 1128098, S/N 1128085.

**HAAS MDL. VF2**, new 8/2006, 36" x 14" tbl., 30" X, 16" Y, 20" Z-axis travels, CAT-40, 7,500 RPM, 20 HP, 24 ATC, extended travel, programmable coolant nozzle, wireless probing, tool length probe, S/N 1051902.

## MILLING MACHINES

**(3) BRIDGEPORT SERIES 1 VERTICAL TURRET**, 9" x 48" tbl., chrome ways, variable spd. 2 HP head, 2-axis D.R.O., S/N 227866, S/N 253941, S/N N.A.

**KEARNEY & TRECKER MDL. H VERTICAL MILL**, S/N 15-2868.

## JIG GRINDER

**MOORE MDL. G18**, air turbine head, (2) positive stops, spare air turbine head, assorted grinding wheels, S/N GD3113.

## LATHES

**HARDINGE 10" X 20" MDL. HLVH PRECISION**, variable spds.: 125–3,000 RPM, assorted toolholders and 5C collets, S/N HLVH-14763-T.

**MONARCH 16-1/2" X 30" MDL. 14C ENGINE**, 10" dia. 3-jaw chuck, S/N 27972.

## RADIAL ARM DRILL

**IKEDA 5' X 13" MDL. RM1575**, plain box tbl., spds.: 30–1,500 RPM, S/N 81477.

## HAND FEED SURFACE GRINDERS

**MITSUI 8" X 18" MDL. MSG250MH**, neurtifier, fine line electromagnetic chuck, S/N 90115527; **HARIG 6" X 12" MDL. 612 BALL WAY**, 6" x 12" fine line electromagnetic chuck, 2-axis D.R.O., S/N H15421.

**HARIG MDL. SUPER 612; BOYAR SCHULTZ MDL. H612; ACER 6" X 12" MDL. SUPRA 618.**

## HYDRAULIC SURFACE GRINDER

**THOMPSON 14" X 48"**, 14" x 40-1/2" electromagnetic chuck, S/N 57923BB565782.

## BANDSAWS

**KAISER JOHNSON MDL. KJ10 HORIZONTAL**, S/N 85021901; **DOALL MDL. 3613-0 VERTICAL**, tbl. extension, blade welder and grinder, variable spd., S/N 244-67117; **DOALL 16" VERTICAL BANDSAW.**

## MACHINE SHOP ACCESSORIES

**TOOLPOST GRINDERS; SWIVEL EYEBOLTS; STANDARD EYEBOLTS; HIGH SPEED GRINDING ATTACHMENT** for surface grinder; **MOORE TOOL SLOT GRINDING ATTACHMENT; RIGHT ANGLE ATTACHMENT; R8 COLLETS; R8 BORING HEADS; ROTARY TBL.; QUICK RELEASE DRILL PRESS VISES; (3) KURT 6" MDL. HDL6 DOUBLE VISES; KURT 6" ANGLE LOCK VISES; KURT 8" ANGLE LOCK VISE; (APPROX. 72) TOOLHOLDERS; CAT-40 SPINDLE TOOLING** incl. shell mills, endmill holders, collet holders and Albrecht chucks; **PRECISION ANGLE PLATES; SPIN INDEX FIXTURES; RADIUS TANGENT DRESSING ATTACHMENTS; PUNCH GRINDING ATTACHMENTS; ELECTROMAGNETIC CHUCKS; DEMAGNETIZERS; ROCKLINIZER ELECTRONIC ENGRAVING UNIT; CUTTING TOOLS; SHOULDER BOLTS; DIE ACCESSORIES; DIE SPRINGS; NITROGAS SHOCKS; STEEL SHIM STOCK; C CLAMPS; LETTER AND NUMBER STENCILS.**

2 AVAILABLE 2016



HAAS VF-3SSYT VERTICAL MACHINING CENTER



MITSUI HAND FEED SURFACE GRINDER



BRIDGEPORT SERIES 1 VERTICAL TURRET MILLING MACHINE



HAAS VF-2 VERTICAL MACHINING CENTER

## MISCELLANEOUS MACHINERY

**MOORE NO. 3 JIG BORER**, assorted accessories, S/N B641; **JOHANSSON 3' SLIDING HEAD DRILL**, adj. ht. tbl., swivel base; **CLAUSING MDL. 2286 PRODUCTION DRILL**, variable spd., oil groove tbl., S/N 525019; **HAMMOND MDL. 1000-VW-B ABRASIVE BELT GRINDER**, 10" belt, tilting tbl., cabinet base, 7-1/2 HP, S/N 1793; **BALDOR DOUBLE END PEDESTAL GRINDER**, 3 HP, cast iron base; **TORIT MDL. VS1500 CABINET STYLE DUST COLLECTOR**, 5 HP, S/N IG321456; **HUPPERT 8 X 12 X 18" CAP. FURNACE**, Type ST, electric fired, S/N 532; **HUPPERT 8 X 8 X 12" CAP. FURNACE**, Type ST, electric fired, S/N 215; **HOPKINS MACHINE SCREW PRESS**, S/N 27882; **DIACRO 12" HAND SHEAR**; **DEE-BLAST BLAST CABINET**, cabinet style; **JET 3 T. CAP. MDL. AP3 ARBOR PRESS**; **FANUC TAPECUT-W1 WIRE EDM MACHINE**; **LINCOLN IDEALARC MDL. TIG300/300 TIG WELDER**, foot pedal, TIG torch, cooler, S/N AC632600.



HARDINGE HLV-H PRECISION LATHE



IKEDA 5' X 13" RADIAL ARM DRILL





**WEDNESDAY,  
SEPTEMBER 15  
9:00 A.M.**

**INSPECTION:**

Monday & Tuesday,  
Sept. 13 & 14  
9:00 A.M. to 4:00 P.M.

**NOTE: EARLY  
START TIME**

**FANUC ROBOTIC WELDING SYSTEM      ABB ROBOTIC WELDING SYSTEM**



**6-AXIS ROBOTIC  
WELDING SYSTEMS**

**ABB FLEXARC MDL. K**, new 2003, Miller Auto Invision 2 pwr. supply, ABB Mdl. IRB2400-M2000 6-axis welding robot, Binzel torch cleaner, Mdl. IRBP250K 2-pos. rotary picture frame positioner, skid mtd., S/N 239-251-0001.

**CUSTOM ROBOTIC ARC WELDING SYSTEM**, (2) Fanuc Arc-Mate 120iB Robotic welding units w/R-J3iB controls, (2) Lincoln Powerwave 455M pwr. supplies, auto torch cleaners, assorted fixturing and tbls.

**ABB ROBOTIC WELDING CELL**, (1998), ABB Mdl. IRB1400-M98 6-axis welding robot, torch cleaning station, Machinery Welder Corporation fixture tbl., Miller Mdl. Auto Invision welder, Miller Mdl. Coolmate miller Mdl. Deltaweld 302 arc welder, w/Miller Mdl. S-22A wire feed, S/N 14- 10466 (not in service, dismantled, in storage).

**WELDERS**

**(2) MILLER DELTAWELD 451 MIG WELDERS**, w/S-22A wire feeder.

**(2) LINCOLN 350MP MIG WELDERS**, (2011), w/wire feeder.

**(3) MILLER DELTAWELD 302 MIG WELDERS**, w/S-22A wire feeders.

**MILLER CP-250 MIG WELDER**, w/S-22A wire feeder.

**MILLER SYNCROWAVE 351 TIG WELDER.**

**MISCELLANEOUS  
WELDING EQUIPMENT**

**LINCOLN ELECTRIC ARTICULATED WELDING BOOM**, Mdl. 84 pwr. feeder; **WORTHINGTON APPROX. 1,000-LB. CAP. WELDING POSITIONER**, 48" rd. platen; **P&H 2,500-LB. CAP. MDL. WP2 WELDING POSITIONER**, 36" rd. platen, S/N 1539; **SEVERAL PORTABLE WELD FUME EXHAUSTERS.**

**PROJECTION SPOT WELDERS**

**PRECISION MDL. ABA-1**, 100 KVA, 18" arms, WTC Weldtronic weld controller, S/N 351294; **BANNER MDL. 1AP75A18**, 75 KVA, 24" throat, Technitron weld controller, S/N 4606; **HOFFMAN MDL. PTS1-2475, 75 KVA**, 24" throat, Entron weld controller; **ACME MDL. PT1P-24-75**, 75 KVA, 24" arms, Entron weld controller, S/N 14327; **BANNER MDL. 1AP75A18**, 75 KVA, 24" throat, Weldtronic Mdl. WT510 programmable weld controller, S/N 4607.

**ROCKER ARM SPOT WELDERS**

**STANDARD MDL. AR3-24-100**, 100 KVA, 24" arms, Weltronic weld controller, S/N 2030; **PEER MDL. AR-475**, 75 KVA, 36" arms, S/N 780148-2; **(2) BANNER MDL. 2CR75A-24**, 75 KVA, 24" throat, S/N 5094 w/Technitron weld controller, S/N 4525 w/Weldtronic weld controller; **PRECISION MDL. ARA-2**, 75 KVA, 24" arms, Technitron weld controller, S/N 070362-2; **BANNER MDL. 2CR75A18**, 75 KVA, 18" throat, Technitron weld controller; **MARTIN ELECTRIC**, 75 KVA, 30" arms, Robotron weld controller, S/N 32634; **JANDA MDL. R25030R**, 50 KVA, 30" throat, Janda Mdl. 600V weld controller, S/N R3036; **(2) PEER MDL. AR450**, 50 KVA, 24" throat, Entron weld controller, S/N 830056, S/N 14629.

**COORDINATE  
MEASURING MACHINE**

**MITUTOYO MDL. BRT-A1220**, measuring range: 47.44" X, 118.31" Y, 39.57" Z-axis, Renishaw Mdl. PH10M motorized probe holder, Renishaw Mdl. TP20 probe, Mitutoyo Geomeasure measuring software, S/N M037204.

**(2) SHEFFIELD MDL. CORDAX 3000 COORDINATE MEASURING MACHINES**, 26" x 37" steel tbls.



**PROJECTION SPOT WELDER**



**STANDARD ROCKER ARM SPOT WELDER**



**HARIG HAND FEED SURFACE GRINDER**

**OPTICAL COMPARATOR**

**ST INDUSTRIES 14" MDL. 20-3500-00**, Series 3500, D.R.O. box, 10X and 20X lenses, assorted accessories, on cabinet base.

**SCHERR TUMICO 14" MDL. 22-1500**, (1984), Power Stage, 20x Lens, w/2-axis programmable digital readout, S/N B842707.

**ASSORTED PRECISION  
INSTRUMENTS**

**WILSON MDL. 4TT ROCKWELL TESTER; ACCUPRO ROCKWELL HARDNESS TESTER; MISAWA SEIKI ROCKWELL HARDNESS TESTER; DETROIT MDL. NST TENSILE TESTER, PIN GAUGES; HARDENED AND GROUND PARALLELS; GAUGE BLOCKS; CALIPERS; MITUTOYO HEIGHTMASTER; CADILLAC HEIGHTMASTER; GRANITE SURFACE PLATES; END MEASURING RODS; MICROFLAT 48" X 48" GRANITE SURFACE PLATE.**

**MITUTOYO BRIGHT APEX COORDINATE MEASURING MACHINE**







**HOIST 20,000-LB. LPG FORKLIFT**



**MITSUBISHI 11,000-LB. LPG FORKLIFT**



**YALE 5,000-LB. LP FORKLIFT**



**TOYOTA 5,000-LB.  
LPG FORKLIFT**

## FORKLIFTS

**HOIST 22,000-LB. BASE CAP. MDL. F220**, new 2002, 22,000-lb. cap. @ 24" L.C., LPG, 58" pwr. forks, side shift, 28" x 14" x 22" cushion tires, S/N 27705.

**MITSUBISHI 12,125-LB. BASE CAP. MDL. FGC55K**, (2002), 11,800-lb. cap. @ 24" L.C., 161" max. lift, side shift, cushion tires, S/N AF8800356.

**YALE 6,000-LB. BASE CAP. MDL. GLP060TFNUAE-7**, 6,000-lb. cap. @ 24" L.C., LPG, 104" max. lift, side shift, large dia. cushion tires, S/N E177316193U.

**HYSTER 5,000-LB. BASE CAP. MDL. S50XM**, (2003), LPG, 3-stage mast, solid tire, side shift, S/N D187V27640A.

**TOYOTA 5,000-LB. BASE MDL. 8FGCU25**, LPG, 4,800-lb. cap. @ 24" L.C., 3-stage mast, 189" max. lift, pwr. forks, side shift, non-mar cushion tires, dock lights, mirrors, 5,951 H.O.M., S/N 34605.

**NISSAN 5,000-LB. BASE CAP. MDL. KCPH02A25PV**, LPG, 4,400-lb. cap. @ 24" L.C., 187" max. lift, S/N KCP-U2P904531 (currently out of service).

**DOOSAN DAEWOO 3,200-LB. CAP. MDL. GC203C-2**, LPG, 3,200-lb. cap. @ 24" L.C., 177" max. lift, side shift, cushion tires, S/N G600333 (currently out of service).

**HYSTER 3,500-LB. BASE CAP. MDL. E35XM ELECTRIC**, 36 v., 2,700-lb. cap. @ 24" L.C., 189" max. lift, side shift, S/N D114V01746T.

**ALSO: BIG JOE WALK BEHIND; CLARK 2,500-LB. CAP. WALK BEHIND**, 106" max. lift.

## CRANES & HOISTS

**GORBEL 2 T. CAP. X APPROX. 24' SPAN FREE STANDING CRANE SYSTEM**, 24' runway travel, Harrington 2 T. cap. chain hoist.

**GORBEL 1 T. CAP. X 12' SPAN FREE STANDING CRANE SYSTEM**, 20' runway travel, CM Loadstar 1 T. cap. hoist.

**CHICAGO TRAMRAIL 5 T. CAP. X 28' SPAN DOUBLE GIRDER CRANE**, pendant control.

**5 T. CAP. X 40' SPAN**, w/P&H wire rope hoist, pendant control.

**INDUSTRIAL CRANE 3 T. CAP. X 28' SINGLE GIRDER CRANE**, pendant control.

**ASSORTED WIRE ROPE AND CHAIN HOISTS UP TO 5 T. CAP.**

## VACUUM LIFTS


**(2) ANVER**, new 2017, 2,200-lb. rated load cap., Anver Mdl. VPF-57 vacuum pack, 12' max. length, 6' max. load width, (2) vacuum cups, S/N 71000230-BD, S/N N.A.

## MATERIAL HANDLING EQUIPMENT

**ORION H66-9 STRETCH WRAP MACHINE**;  
**(2) 20,000-LB. DIGITAL PLATFORM SCALES**, w/84" x 60" platform; **YALE 5,000-LB. CAP. ELECTRIC PALLET JACK**;  
**HYDRAULIC PALLET JACKS**; **BANDING CARTS**; **PNEUMATIC BANDING TOOLS**;  
**(2) POLYCHEM PLASTIC AND STEEL PNEUMATIC BANDING TOOLS**; **ASSORTED ELECTRIC CHAIN AND WIRE ROPE HOISTS** up to 4 T. cap; **ASSORTED HEAVY LIFTING CHAINS**; **(6) SINGLE SIDE CANTILEVER RACKS**, 48" arms, adj. ht., w/large qty. of perforated material, carbon steel, stainless steel, some aluminum;  
**(100's) OF COLLAPSIBLE WIRE BASKETS.**



**HUNDREDS OF COLLAPSIBLE WIRE BASKETS**

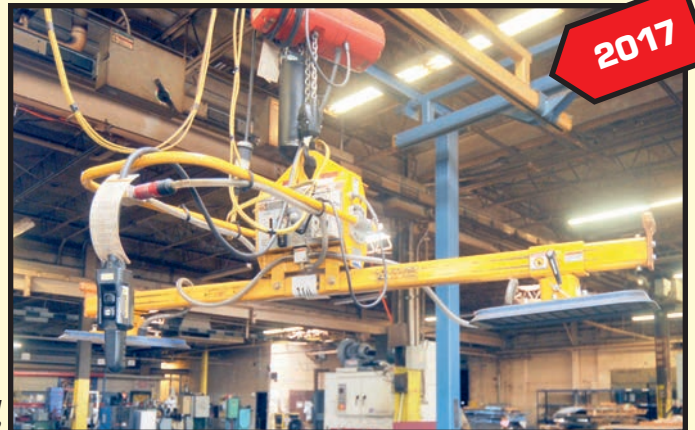

**ANVER VACUUM  
SHEET LIFTER**

**2017**





GORBEL 1 T. FREE STANDING CRANE SYSTEM



SULLAIR LS-12 ROTARY SCREW AIR COMPRESSOR



GENIE SELF-PROPELLED SCISSOR LIFT

## AIR SYSTEMS

**(2) SULLAIR MDL. 16BS-75HACAC ROTARY SCREW AIR COMPRESSOR**, 75 HP, air cooled, 10,602 H.O.M., S/N 003-83899, S/N 003-91919.

**SULLAIR MDL. 16BS-75HACAC24KT ROTARY SCREW AIR COMPRESSOR**, 75 HP, air cooled, noise enclosure, 6,785 H.O.M., S/N 003-94694.

**INGERSOLL RAND MDL. SSREP75**, 75 HP, air cooled, S/N N.A.

**SULLAIR MDL. LS12-50H/A/SUL ROTARY SCREW AIR COMPRESSOR**, 50 HP, air cooled, 44,000 H.O.M., S/N 003-125091.

**HANKINSON MDL. HPR-400 REFRIGERATED AIR DRYER**, 400 CFM cap., S/N H400A4601409002.

**HANKINSON MDL. HPRP750-460 REFRIGERATED AIR DRYER**, 750 SCFM, 100 PSI, S/N RH0B37504A2E14005.

**BEKO DRY POINT RA REFRIGERATED AIR DRYER**, new 2016, 375 SCFM, S/N 4028657.

**APPROX. 36" DIA. X 10' HT. AIR RECEIVING TANK**, new 2014.

## SELF-PROPELLED SCISSOR LIFTS

**JLG MDL. 2032ES**, (2003), 500-lb. platform cap., S/N 0200113841.

**JLG MDL. 1930ES**, (2005), 500-lb. platform cap., S/N 0200124356.

**GENIE MDL. GS1930**, 500-lb. platform cap., extendable pulpit, 742 H.O.M., S/N N.A.

## ELECTRICAL SUPPORT ITEMS

**APPROX. (25) 10' BUSS DUCT SECTIONS**, Square D I-line aluminum, 3-conductor, approx. 100 KVA, 800 amp, 277/480 v., 3-phase, 4-wire, aluminum plug-in buss way; **(2) LARGE FEDERAL PACIFIC TRANSFORMERS**, 150 KVA.

## MISCELLANEOUS SHOP & WAREHOUSE EQUIPMENT

LOT OF FABRICATION BUILDING SUPPORT EQUIPMENT, TO INCLUDE: SHOP CARTS; WORKBENCHES; OXYACETYLENE TORCH SETS; LIGHT DUTY SHELVING; PUNCHES; BARREL PUMPS; 2-HANDED WHEEL CARTS; FIRE EXTINGUISHERS; HAND TOOLS; POWER TOOLS; SINGLE SPINDLE DRILL PRESS; DOUBLE-END GRINDERS; INSPECTION EQUIPMENT; ASSORTED HEAVY DUTY STEEL SHELVING; FANS; LADDERS; STAINLESS STEEL CARTS; BELT GRINDERS; WALKIES; TIMESAVERS MDL. 948 SANDER; WELDING CURTAINS; BANDING CARTS; PALLET LIFTS; PORTABLE STAIRS; VIDMAR TOOL CABINETS; BENCH TOP SCALES; TAPERS; DIACRO NO. 12 ROLL SLIP; DIE LIFTS; FORK LIFT FLIP OVER ATTACHMENT; AND MITER SAWS; FACTORY CAT WALK BEHIND SWEEPERS.

## DIRECTIONS & LODGING

**DIRECTIONS FROM O'HARE INTERNATIONAL AIRPORT:** Exit airport using Chicago O'Hare International Airport Road for approx. 2-1/2 miles which will become I-190E. Take the South River Road Exit, Exit 1B and merge onto N River Road. Proceed approx. 1 mile and turn right onto Ainslie Street. Proceed to auction site on the right, 9500 Ainslie Street, Schiller Park, IL 60176-1116. Watch for auction signs.

**HAMPTON INN**.....(847) 671-1700  
3939 Mannheim Road, Schiller Park, IL 60176

**HOLIDAY INN**.....(773) 693-5800  
5615 N. Cumberland Ave., Chicago, IL 60631

## INSPECTION:

Monday & Tuesday, September 13 & 14,  
9:00 A.M. to 4:00 P.M.

## ONLINE REGISTRATION

Register to bid at **BidSpotter.com** or **proxibid**

1. Use the [link](http://link) to Bidspotter.com or Proxibid.com on PMI's website calendar. [www.pmi-auction.com](http://www.pmi-auction.com) DO IT NOW!
2. This auction may require a Cash, or credit card, or debit card, 100% refundable deposit. If by credit or debit card, it can be added through the Bidspotter.com or Proxibid.com fully secure and PCI compliant registration process and will be assessed a 100% refundable \$3,000 (US Bidder) or a \$10,000 (Foreign Bidder) deposit in order to be approved to bid online with this auction. Cash deposits can be made by wire transfer.  
**DON'T WAIT.** If you are unsuccessful in the auction, the refund of your credit/debit card deposit will occur shortly after the auction ends. Cash deposits will be expedited as well.  
If you need assistance, don't hesitate to call (713) 691-4401.  
**ALL BIDS ARE SUBJECT TO AN 18% BUYER'S PREMIUM.**

Live Onsite w/Webcast – At the Premises of

**MIDLAND STAMPING  
& MACHINING**  
9500 AINSLIE STREET  
SCHILLER PARK, ILLINOIS 60176

**WEDNESDAY,  
SEPTEMBER 15  
9:00 A.M.**

**PARTIAL TERMS & CONDITIONS:** A 15% Buyer's Premium Will Apply Onsite. An 18% Buyer's Premium Will Apply Online. Everything will be sold to the highest bidder or bidders for cash in accordance with the auctioneer's Customary Terms of Sale, copies of which will be posted on the premises.

**ALL PAYMENTS MUST BE MADE BY CASH, CASHIER'S CHECK, WIRE TRANSFER OR COMPANY CHECK WITH BANK LETTER GUARANTEEING PAYMENT TO PLANT & MACHINERY INC.**

Here is an example of what your letter should be: Mr. "Customer Name" is a customer of this bank. This bank will guarantee unqualified payment to PMI on the account listed herein up to the amount of \$\_\_\_\_\_. This letter is good until October 15, 2021. In default of payment of bills in full within the time therein specified, the Auctioneer in addition to all other remedies allowed by law, may retain all monies received as deposit or otherwise, as liquidated damages. All items must be removed by the time announced at the start of the sale.

Lots not paid for and/or removed within the time allowed may be resold at public or private sale without further notice, and any deficiency, together with all expenses and charge of resale, will be charged to the defaulting purchaser.

The buyer acknowledges that he or an agent has inspected all of the assets upon which he will be bidding and/or does purchase.

Buyer agrees to accept assets purchased "AS IS," WITH "ALL FAULTS" AND "WITH REMOVAL AT BUYER'S RISK AND EXPENSE." THE AUCTIONEER EXPRESSLY DISCLAIMS ON THE PART OF THE AUCTIONEER AS AGENT AND THE SELLER, ANY WARRANTY AS TO FITNESS OR USABILITY OF ALL THE ASSETS, AND THE BUYER EXPRESSLY WAIVES ANY CLAIM IN RESPECT TO ANY POSSIBLE FUTURE USE OF ANY ASSET PURCHASED FOR ANY PURPOSE WHATSOEVER.

The buyer does hereby assume and does agree to indemnify and hold the auctioneer harmless from any future claim which shall pertain to the fitness or use of that asset as being purchased. Riggers, movers, electricians and buyers performing work at the Auction Site must provide PMI with evidence of insurance. The insurance coverage must be at a level acceptable to PMI and to the seller. PMI reserves the right to withdraw items, alter the order of the sale, accept bids from the seller, and group lots as it may deem appropriate. This auction may include consignment items.

Although all information has been obtained from sources deemed reliable, the auctioneer and seller make no warranty or guarantee, expressed or implied, as to the accuracy of the information herein contained, or contained in our catalog. It is for this reason that buyers should avail themselves of the opportunity to make inspection prior to the auction. Although it is not likely, auction sales are subject to cancellation or postponement. Kindly contact auctioneer prior to attendance.

These terms and conditions may be modified or supplemented by language in the catalog available at the sale site or by announcement at the start of the sale. Bidders should be attentive to those announcements and to the catalog language.



# PLANT & MACHINERY INC.

AUCTIONEERS • APPRAISERS • LIQUIDATORS • REAL ESTATE

P.O. Box 218568  
Houston, TX 77218-8568

**DATED MATERIAL - PLEASE DELIVER**



**PUBLIC INVITED**

**WED., SEPT. 15 • 9:00 A.M.**



## MASSIVE STAMPING, FABRICATING & MACHINING FACILITY

Featuring: (17) STRAIGHT SIDE PRESSES Incl.  
(7) MINSTER HEVI-STAMPERS up to 600 T. Cap.  
(see videos); High Speed & OBI Minster Presses;  
Massive Amounts of Press Feed Equip.;  
Huge Fab Shop with 2016 ACCURPRESS 750 T. x 14'  
CNC Pressbrake & 2016 MAZAK 6,000 Watt Fiber  
Laser II; Machine Shop w/Several HAAS VMCs  
New as 2016; Robotic Welding Cells; Q.C. Dept.;  
Raw Material; Forklifts; MORE

**ATTENTION: PLANT MANAGER  
OR EQUIPMENT BUYER**

Presorted  
First Class Mail  
U.S. Postage  
PAID  
Eugene, Oregon  
Permit No. 17



**SCHILLER PARK, ILLINOIS**

**400 T.**



MINSTER  
E2-400-108-54  
"HEVI-  
STAMPER"  
STRAIGHT SIDE  
ECCENTRIC  
GEARED PRESS

**2  
AVAILABLE**



HAAS VF-3SSYT  
VERTICAL  
MACHINING  
CENTER

**2016**



MITSUBISHI 11,000-LB. LPG FORKLIFT

**DON'T MISS THIS SALE!**

**2006**



HAAS VF-2 VERTICAL MACHINING CENTER

**600 T.**



VERSION  
S4-600-132-68T  
4-POINT ECCENTRIC  
GEARED STRAIGHT  
SIDE PRESS

MITUTOYO BRIGHT  
APEX COORDINATE  
MEASURING MACHINE

